

bougel®

Huzhou Everpeak Technology Co.,Ltd

Professional In Fans Heaters And Motors

Huzhou EverpeakTechnology Co.,ltd
Add: No.1888 Dongni Rd.Huzhou city ,
Zhejiang province,China
Tel:0086-0572-2058890
Email:info@everpeaktek.com
Website:www.everpeaktek.com



PRODUCT CATALOGUE



INTRODUCTION

Huzhou Everpeak Technology Co., Ltd., an innovation leader in the fan&heater sector under Yongchang Holding Group, adheres to the core philosophy of "Smart Comfort, Green Tomorrow" and aspires to become a global pacesetter in the fan industry.

Leveraging the group's technological and resource strengths, the company specializes in fan&heater R&D and manufacturing employing intelligent production systems to create diversified fan&heater products characterized by high energy efficiency, quiet operation, comfortable performance, and stylish design—dedicated to delivering an unparalleled air experience for every customer.

We invite you to join us in shaping a smarter, greener future together.

Company philosophy: Serve users, contribute to society, and develop ourselves.

Corporate mission: Provide high-quality and cost-effective products for global customers.

Enterprise spirit: Start businesses with perseverance, achieve success through quality, and base on integrity.



USA BRANDS



EUROPE BRANDS



OTHER COUNTRIES BRANDS



CONVECTOR HEATER



Features:
1500W Glass Panel Convector Heater
AC 230V,50Hz,1500W
Variable temperature control
Tip-over protection and overheat protection
2 heat settings:750W/1500W
WALL MOUNTED & FREESTANDING

Model	Unit Size (mm)	N.W/G.W.(kg)	Packing Size (mm)	20'GP (pcs)	40'HQ(pcs)
GPH-S15	660x220x430	5/6.4	695x2505x465	760	1700



1500W Glass Panel Convector Heater
2 heat settings: 750W/1500W
Freestanding and wall mounted available
With big LED display and remote control
With timer and temperature setting function

Model	Unit Size (mm)	N.W/G.W.(kg)	Packing Size (mm)	20'GP (pcs)	40'HQ(pcs)
GPH-S15D	660x220x430	5/6.4	695x2505x465	760	1700



Anti-frost function
Child lock function
Tip-over switch protection
WIFI (TUYA) function is optional

CONVECTOR HEATER



CH-04
Convector Heater
220-240V, 50-60Hz, 1800-2000W
2 heating levels
Adjustable thermostat control
Power indicator



CH-06/
Convector Heater
220-240V, 50-60Hz, 1800-2000W
2 heating levels
Adjustable thermostat control
Power indicator



CH-06F
Convector Heater with Turbo Fan
AC220-240V, 50-60Hz, 1800-2000W
4 setting levels: LOW HEAT/HIGH HEAT/
LOW HEAT+FAN/HIGH HEAT+FAN
With Tip-over switch protection
Adjustable thermostat



CH-01/CH-01F/CH-01T/CH-01TF
Convector Heater
220-240V, 50-60Hz, 1800-2000W
2 heating levels
Adjustable thermostat control
Power indicator
24 hours timer and turbo fan optional
Circle and diamond panel optional

Model	Unit Size (mm)	N.W/G.W.(kg)	Packing Size (mm)	20'GP (pcs)	40'HQ(pcs)
CH-04	565x202x325	1.85/2.3	582x145x330	1120	2560
CH-06	520x202x360	2.4/3.2	575x145x375	980	2280
CH-06F	520x202x360	2.5/3.3	575x145x375	980	2280
CH-01 series	600x260x385	3.1/3.8	635x140x420	760	1850

CONVECTOR HEATER



CH-0710/CH-0715/CH-0720

Convector Heater
1000W/CH-0710, 1500W/CH-0715, 2000W/CH-0720
2 heating levels
X-shaped Aluminum Heating Element

Water-proofed class: IP24
Adjustable thermostat control
Power indicator
Freestanding and wall mounted use



CH-02TF

Digital Convector Heater
220-240V, 50-60Hz, 2300W
3 heating powers: 1000W/1300W/2300W
LCD display with remote control
24 hours timer
Temperature setting function
With turbo fan
Anti-frost mode
TUYA WIFI optional

CZ600/CZ650B

Baseboard convector heater
AC220-240V, 50-60Hz, 1800-2000W
2 heating setting levels
With timer and temperature setting function
With LED display
Tip-over switch protection

Model	Unit Size (mm)	N.W/G.W.(kg)	Packing Size (mm)	20'GP (pcs)	40'HQ(pcs)
CH02TF	680x220x435		775x160x435	552	1270
CZ600/CZ650B	740x130x230	2.1/2.5	770x168x273	820	2000
CH-0710	475x250x500	2.5/3.1	605x130x360	980	2400
CH-0715	615x250x500	3.4/4.1	510x125x500	870	2125
CH-0720	775x250x500	4.2/4.9	650x125x500	680	1670

CONVECTOR HEATER

HDT22ZK

2200W Digital Baseboard Convector Heater
2 heat setting levels: 1100W/2200W
With LED display and remote control
Timer & temperature setting function
Tip-over switch protection
Unit Size: 1050x105x242mm



HDT22YY

2200W Mechanical Baseboard Convector Heater
2 heat setting levels: 1100W/2200W
Power indicator light
Tip-over switch protection
Unit Size: 1050x120x242mm



WH-NDT20T01

2000W Mechanical Baseboard Convector Heater
3 heat setting levels: 800W/1200W/2000W
Power indicator light
Tip-over switch protection
Unit Size: 960x130x220mm



WH-NDT20T02R

2000W Digital Baseboard Convector Heater
3 heat setting levels: 800W/1200W/2000W
With LED display and remote control
Timer & temperature setting function
Tip-over switch protection
Unit Size: 960x130x208mm



CONVECTOR HEATER



YF-HMC-2000W



YF-HMC-2000TW

Convection Heater

YF-HMC-2000

- Metal cabinet
- Dimensions of the product :600 (w)x 100 (D)x 350 (H) mm (NOT INCLUDE THE PLASTIC FEET)
- Black Power cord and plug: PvC plastic raw material (VDE approved) H05 VV-F3 x0.75 mm
- Length of power cord (visible) :1.5 meterlong (VDE approved)
- Optional with Timers

Power	Voltage	Thermostat
2000 w (750W+1250W)	220-240 v	C°.

Container load
20': 916 pcs
40': 1880 pcs
40' HC:2194 pcs

Specifications

Model No.	Power	Thermostat	Plastic feet	Wall mounted	Turbo fan	24H timer	Container load		
							20'	40'	40' HC
HMC-2000	750 / 1250 / 2000 W	✓	✓	✗	✗	✗	916 pcs	1888 pcs	2194 pcs
HMC-2000W				✓	✗	✗			
HMC-2000T				✗	✓	✗			
HMC-2000-TIM				✗	✗	✓			
HMC-2000TW				✓	✓	✗			
HMC-2000W-TIW				✓	✗	✓			
HMC-2000T-TIM				✗	✓	✓			
HMC-2000TW-TIM				✓	✓	✓			

Function



24H timer



Wall - mounter device



Turbo fan
To accelerate heat convection



Traditional heating element

CONVECTOR HEATER



Remote Control Convection Heater

YF-HRMC-2000-RM

- Metal cabinet
- With overheat protection
- With traditional heating element
- With turbo fan

Three Heat Setting			Timer	Thermostat
750 w	1250 w	2000 w		
750 w	1250 w	2000 w	24 h	C°.

Container load

20': 916 pcs / 40': 1888 pcs / 40' HC: 2194 pcs

Function



Wall - mounter device



Turbo fan
To accelerate heat convection



Traditional heating element

CONVECTOR HEATER

THIN FILM OIL HEATER



DL01S

Volts:220-240V-50-60Hz1800-2000V
Power: 3heating powers 750/1250W/2000W
Over heating protection
Adjustable thermostat control
Heating wire element
With carry handle
Free standing



DL01S Turbo

Volts:220-240V-.50-60Hz1800-2000W
Power: 3heating powers 750/1250W/2000W
Overheating protection
Adjustable thermostat control
Heating wire element
With carry handle
Free standing
With turbo



DL01S Timer

Volts:220-240V-.50-60Hz1800-2000W
Power: 3heating powers 750/1250W/2000W
Overheating protection
Adjustable thermostat control
Heating wire element
With carry handle
Free standing
With turbo



DL01S Timer/Turbo

Volts:220-240V-.50-80Hz1800-2000V
Power:3heating powers 750/1250W/2000W
Over heating protection
Adjustable thermostat control
Heating wire element
With carry handle
Free standing
With Timer & Turbo

Model	Giftbox size(mm)	Model No	N.W/G.W(Kg)	Product size(mm)	20' FT	40' FT	40' HQ
DL01S	575X133X395	DL01S	1.9/2.45	535X198X380	950pcs	1920pcs	2270pcs
		DL01S Timer	2.35/2.95				
		DL01S Turbo	2.1/2.7				
		DL01S Timer/Turbo	2.4/3.0				



HY-304

Model	HY-304	HY-501
Power	1000W	1000W
N.W(Kg)	8.1	9.0
G.W(Kg)	8.9	9.8
Giftbox(mm)	1070X90X620	1200X90X615
QTY/40HQ	1140	1040



HY-501

3 Heat Settings
Adjustable Thermostat
Overheat protection
Indicator light
Castor for easy movement

Optional towel dryer
Optional humidifer
Optional remote control(HY-501)
Power:1000W



HY-JX40

Adjustable thermostat control
Overheat protection
Powerindicatorlight
Free standing



HY-LED80

Weeklytimer and 24H timer
Adjustable thermostat control
Overheat protection
Powerindicatorlight
Wallmounted and wall mounted

Model	HY-LED40	HY-LED60	HY-LED80	HY-LED100	HY-JX40	HY-JX60
Power	400W	600W	800W	1000W	400W	600W
N.W(Kg)	4.3	6.5	8.4	10.1	4.3	6.5
G.W(Kg)	5.9	8.7	10.5	12.7	5.9	8.7
Giftbox(mm)	620X95X605	840X95X605	1070X95X605	1245X95X605	620X95X605	840X95X605
QTY/20GP	730	540	410	360	730	540
QTY/40GP	1570	1160	900	780	1570	1160
QTY/40HQ	1850	1370	1060	920	1850	1370

CONVECTOR HEATER



Convection Heater
YF-HMA-2000

- Metal cabinet
- Dimensions of the product :589 (W) x 92.5 (D)x 335 (H)mm (NOT INCLUDE THE PLASTIC FEET)
- Black Power cord and plug : PVC plastic raw material (VDE approved) H05 VV-F3 x 0.75 mm
- Length of power cord (visible): 1.5 meter long (VDE approved)
- Optional with Timer

Power	Voltage	Thermostat
2000 W (750W + 1250W)	220-240 v	

Container load
20' : 1020 pcs / 40' : 2100 pcs / 40' HC: 2345 pcs

Specifications

Model No.	Power	Thermostat	Plastic feet	Wall mounted	Turbo fan	24H timer	Container load		
							20'	40'	40'HC
HMA-2000	750 / 1250 / 2000 W	✓	✓	✗	✗	✗	1020 pcs	2100 pcs	2345 pcs
HMA-2000W				✓	✗	✗			
HMA-2000T				✗	✓	✗			
HMA-2000-TIM				✗	✗	✓			
HMA-2000TW				✓	✓	✗			
HMA-2000W-TIM				✓	✗	✓			
HMA-2000T-TIM				✗	✓	✓			
HMA-2000TW-TIM				✓	✓	✓			




YF-HMA-2000TW



YF-HMA-2000W

Function

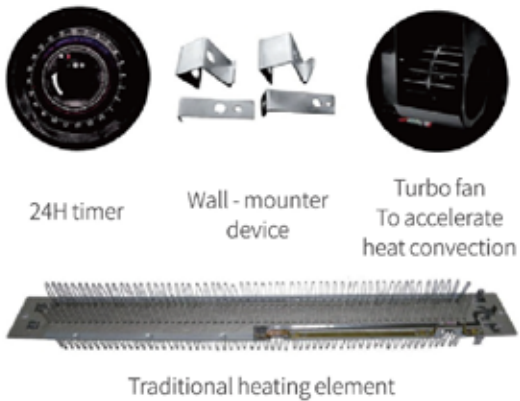

24H timer
Wall - mounter device
Turbo fan
To accelerate heat convection
Traditional heating element

CONVECTOR HEATER



Convection Heater

YF-HMA-2000 Plain Pane

- Metal cabinet
- Dimensions of the product :589 (W) x 92.5 (D)x 335 (H)mm (NOT INCLUDE THE PLASTIC FEET)
- Black Power cord and plug : PVC plastic raw material (VDE approved) H05 VV-F3 x 0.75 mm
- Length of power cord (visible): 1.5 meter long (VDE approved)
- Optional with Timer

Power	Voltage	Thermostat
2000 W (750W + 1250W)	220-240 v	

Container load
20' : 1020 pcs / 40' : 2100 pcs / 40' HC: 2345 pcs

Specifications

Model No.	Power	Thermostat	Plastic feet	Wall mounted	Turbo fan	24H timer	Container load		
							20'	40'	40'HC
HMA-2000-2	750 / 1250 / 2000 W	✓	✓	✗	✗	✗	1020 pcs	2100 pcs	2345 pcs
HMA-2000-2-W				✓	✗	✗			
HMA-2000-2-T				✗	✓	✗			
HMA-2000-2-TIM				✗	✗	✓			
HMA-2000-2-TW				✓	✓	✗			
HMA-2000-2-W-TIM				✓	✗	✓			
HMA-2000-2-T-TIM				✗	✓	✓			
HMA-2000-2-TW-TIM				✓	✓	✓			




YF-HMA-2000-2-TW



YF-HMA-2000-2

Function

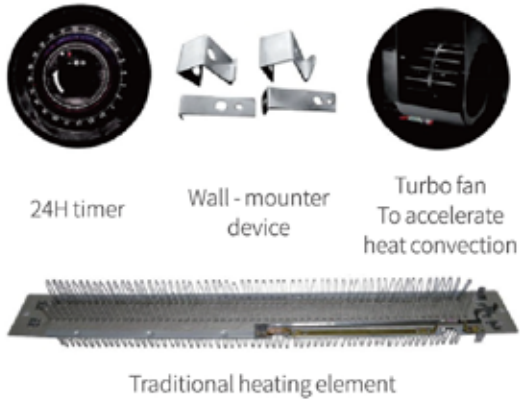

24H timer
Wall - mounter device
Turbo fan
To accelerate heat convection
Traditional heating element

CONVECTOR HEATER



- YF-TLS-603T
- 2 heating powers:1000W/2000W
 - Over-heat protection
 - Tip-over protection
 - Adjustable thermostat
 - Mobile standing use only
 - With Turbo Fan
 - 220-240V~50Hz,2000W, VDE plug
 - 1pc in color box, No master carton

 - Product: 680X165X420mm
 - N.W.: 4 KG
 - Color box:735X135X385mm
 - G.W.: 5 KG

Container load

20':765 pcs / 40':1360 pcs / 40'HC:1632 pcs

CONVECTOR PANEL HEATER



YF-HMPH-2000W-TIM



YF-HMPH-1500W-TIM



YF-HMPH-1000W-TIM

Convection Panel Heater

HMPH-1000 / HMPH-1500 / HMPH-2000

- with aluminium heating elements
- Two in one: Free standing on the floor and wall-mounted
- Over heat protection
- Thermostat adjustment
- Optional with 24H programable timer

Power		
2000 ^w HMPH-1000	1500 ^w HMPH-1500	2000 ^w HMPH-2000

Container load			
Model:	HMPH-1000	HMPH-1000	HMPH-1000
20' :	1360 pcs	948 pcs	691 pcs
40' :	2791 pcs	1986 pcs	1440 pcs
40' HC:	3190 pcs	2270 pcs	1646 pcs

Function



24H timer



Wall - mounter device



Aluminium heating element

BATHROOM/BABY ROOM HEATER



YF-HMPH-400S

Bathroom / Baby Room heater

YF-HMPH-400SL

- for bathroom /toilet & for baby/children sleeping room
- Metal cabinet.two-in-one : free standing and wall-mounted, with detachable plastic feet
- With aluminium heating element (water-proof)
- Dimensions of the product, 330 (W)x 65 (D)x 280 (H) mm
- Water-proof Power cord and plug, PVC plastic raw material (VDE approved) H05 VV-F3 x0.75 mm
- Length of power cord (visible) , 1.5 meter long (VDEapproved)
- With Thermostat (water-proof) Optional with feet - \$0.13

Power	Voltage	IPX4 Water Proof
400 _w	220-240 _v	

Container load
20': 1820 pcs / 40': 3644 pcs / 40' HC: 4220 pcs

Specifications

Model No.	Power	Thermostat	Plastic feet	Wall mounted	Waterproof	Container load		
						20'	40'	40'HC
HMPH-400S	400 W	✓	✗	✓	IPX4	1820 pcs	3644 pcs	4220 pcs
HMPH-400L		✓	✓	✗				
HMPH-400SL		✓	✓	✓				

Function



Wall - mounter device



Aluminium heating element

CONVECTOR PANEL HEATER



YF-HMB-1250-TIM



YF-HMB-800-TIM



YF-HMB-1000-TIM



YF-HMB-600-TIM

Convection Panel Heater

HMB-600 / HMB-800 / HMB-1000 / HMB-1250

- With aluminium heating element
- Two in one : Free standing and wall-mounted
- With mechanical thermostat
- With overheat protection
- Optional with 24H timer

Power			
600 _w HMPH-600	800 _w HMPH-800	1000 _w HMPH-1000	1250 _w HMPH-1250

Container load

Model:	HMPH-600	HMPH-800	HMPH-1000	HMPH-1250
20' :	1398 pcs	1100 pcs	1100 pcs	880 pcs
40' :	2880 pcs	2238 pcs	2238 pcs	1818 pcs
40' HC:	3150 pcs	2432 pcs	2432 pcs	1976 pcs

Function



24H timer



Wall - mounter device



Aluminium heating element

PTC HEATER SERIES



220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Automatic ControlTemperature
Overheat protection
PowerIndicatorLight

PTC-11A



PTC Ceramic Heater
220-240V~50160Hz
2 heating settings:750W1500W
or 900/1800W
Overheat Protection
Safety tip-over switch
PTC heating element
Adjustable thermostat

PTC-905



PTC Ceramic Heater
220-240V~50160Hz
2 heating settings:750W1500W
or 900/1800W
Overheat Protection
Safety tip-over switch
PTC heating element
Adjustable thermostat

PTC-906



PTC Ceramic Heater
220-240V~50160Hz
2 heating settings:750W1500W
or 900/1800W
Overheat Protection
Safety tip-over switch
PTC heating element
Adjustable thermostat
Wide angle oscillation

PTC-905A

Model	PTC-11A	PTC-906	PTC-905	PTC-905A
Power	500W/600W	1500W/1800W	1500W/1800W	1500W/1800W
N.W/G.W(Kg)	0.6/0.65	1.0/1.15	1.15/1.3	1.15/1.3
Giftbox(mm)	155X105X168	165X130X260	203X162X263	203X162X283
Exportcarton(mm)	610X240X570	535X174X535	500X212X540	500X212X580
PCS/CTN	18	8	6	6
PCS/20'	9000pcs	4400pcs	3000pcs	2830pcs
PCS/40'	18990pcs	9160pcs	6072pcs	5760pcs
PCS/40' HQ	21996pcs	10600pcs	7260pcs	6702pcs

PTC HEATER SERIES



PTC-601

- 24 hours time
- 2 heatingpowers.1000W/2000W
- Safety PTC ceramic heating element
- Remote control
- Wallmounted sets included
- Overheating Protection
- With LED display



PTC-602

- 24 hours time
- 2 heatingpowers.1000W/2000W
- Safety PTC ceramic heating element
- Remote control
- Wallmounted sets included
- Overheating Protection
- With LED display



PTC-602N

- 2heatingpowers:1000W/2000W
- Safety PTC ceramic heating element
- Fan/warm/hot wind for selection
- Wallmounted sets included
- Overheating Protection


Wall-mounted bathroom heater



SW-FH08



SW-FH06

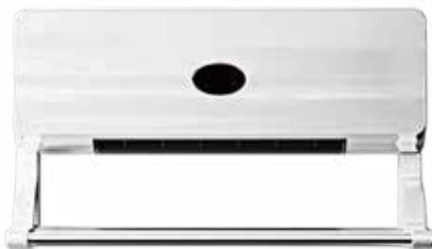

SY-FH11



SY-FH12

Model	Power	N.W/G.W	Product size	Box size	40HQ(PCS)
SW-FH-06	1200-2000	2.3/3.0	325.5X296X139	370X140X315	4100
SW-FH-08	1200-2000	2.3/3.0	325.5X296X139	370X140X315	4100
SY-FH11	1200-2000	1.6/2.3	205X130X565	155x95x560	4500
SY-FH12	1200-2000	1.6/2.3	205X130X565	155x95x560	4500

Wall-mounted bathroom heater



RLBG01-20RXS

Operation: Mechanical/Electronic remote control
Color: White + Black
Rated voltage: 220V
Rated power: 2000W
Product material: PP + Nylon

Timing: 8 - hour timing
Outer box size: 390*320*160MM
Product size: 327*257*158MM
Gross weight: 2.5kg
Net weight: 2.1kg



RLBG02-20XS

Operation: Mechanical/Electronic remote control
Color: White + Black
Rated voltage: 220V
Rated power: 2000W
Product material: PP + Nylon

Timing: 1 - 2 hours timing
Outer box size: 390*320*160MM
Product size: 327*257*158MM
Gross weight: 2.5kg
Net weight: 2.1kg

Model	Power	N.W/G.W	Product size	Box size
RLBG01-20RXS	2000W	2.1/2.5	327X257X158	390X320X160
RLBG01-20XS	2000W	2.1/2.5	327X257X158	390X320X160

Wall-mounted bathroom heater



G03



G04



G05



G08

Model	Power	N.W/G.W	Product size	Box size	40HQ(PCS)
G01	1200-2000	2.0/2.5	530X205X125	570X175X255	3,3500
G03	1200-2000	2.1/2.6	530X205X125	570X175X255	2,600
G04	1200-2000	2.1/2.6	530X205X125	570X175X255	2,600
G05	1200-2000	1.5/2.0	530X205X125	570X175X255	2,600
G08	1200-2000	1.5/2.0	530X205X125	570X175X255	2,600

Voice-controlled heater



TJX-25-2

- 12-hour timer
- Temperature display
- Drying mode, for hanging clothes
- 3D changing flame effect
- Voice control
- Humidifying spray
- Remote control
- Overheat protection
- Power cut when tilted/fallen
- Intelligent constant temperature



TJX-24-1

- Temperature display
- 3D flame changing effect
- Voice control
- Humidifying spray
- Remote control
- Overheat protection
- Power-off when tipped over
- Intelligent constant temperature
- 12 - hour timer

Model	Power	N.W	Product size	Box size
TJX-25-2	2200/1100	6.5	102X15X20	114X20.5X25.5
TJX-24-1	2200/1100	5.6	97X15X20	109X20.5X25.5

Dual-purpose (heating and cooling) bladeless heater



AW-3002

AW-3004

Material: ABS+PP
Specifications(L*W*H):270*270*1016 mm
Packing Specifications (L*W*H):330*322*1073 mm
Product features
1.3-speed settings 2.Multi-stage timer
3.60° automatic swing; 60° 4.Sleep mode
5.Ambient light 6.Mist function
7.TScreen display/Touch control/Remote control

PTC HEATER



J1006/J1006A-SJ

Material: ABS+ PP+PA(66)
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.3 kg /3 kg
Specifications(L*W*H):220*210*835 mm
Packing Specifications(L*W*H):265*265*835 mm
1*40HQ PCS: 1,159 PCS



J1007/J1007B

Material: ABS+ PP+PA(66)
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.5 kg /3.3 kg
Specifications(L*W*H):150*150*875 mm
Packing Specifications(L*W*H):200*195*875 mm
1*40HQ PCS: 1,947 PCS



J1008/J1008B

Material: ABS++PA
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 3.4 kg /4.3 kg
Specifications(L*W*H):230*130*900 mm
Packing Specifications(L*W*H):270*275*930 mm
1*40HQ PCS: 984 PCS

PTC HEATER



SY-281

Material: METAL+ PP+PA(66)
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.3 kg /3 kg
Specifications(L*W*H):165*173*484 mm
Packing Specifications(L*W*H):170*180*490 mm
1*40HQ PCS: 4,534 PCS



SY-283/SY-280E

Material: METAL+ PP+PA(66)
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.6 kg /3.0 kg
Specifications(L*W*H):178*176*780 mm
Packing Specifications(L*W*H):185*180*785 mm
1*40HQ PCS: 2,600 PCS



SY-280

Material: METAL+PA+PA(66)
Input voltage:110V--240V AC
Power :1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.6 kg /3.0 kg
Specifications(L*W*H):178*176*780 mm
Packing Specifications(L*W*H):185*180*785 mm
1*40HQ PCS: 2,600 PCS

PTC HEATER



SY-T01/SY-T02

Material: METAL+ PP+PA(66)
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.3 kg /3 kg
Specifications(L*W*H):190*190*465 mm
Packing Specifications(L*W*H):160*170*445 mm
1*40HQ PCS: 4,500 PCS



SY-T03/SY-T04

Material: METAL+ PP+PA(66)
Input voltage:110V--240V AC
Power:1,200-2,000W
Heating technology:PTC
N.W /G.W : 2.6 kg /3.0 kg
Specifications(L*W*H):190*190*605 mm
Packing Specifications(L*W*H):170*185*635 mm
1*40HQ PCS: 3,400 PCS



KF011-JYH/KF011-CYHWA

Material: ABS+PA+PA(66)
Input voltage:110V--240V AC
Power :1,200-2,000W
Heating technology:PTC
N.W /G.W : 3.0 kg /3.5 kg
Specifications(L*W*H):240*160*720 mm
Packing Specifications(L*W*H):250*190*735 mm
1*40HQ PCS: 4,550 PCS

PTC HEATER



YF-2501Y



YF-2301



YF-2316

Model	Power	N.W/G.W	Product dimensions
YF-2501Y	2000W	1.6	215X215X725
YF-2301	2000-2800W	4.5/5.5	215X215X850
YF-2316	2000-2800W	4.8/5.8	210X210X725



YF-1903-15



YF-2108

Model	Power	N.W/G.W	Product size	20'	40'	40"HC
YF-1903-15	1500W	1.16/1.3	120X120X300	2799	5607	6813
YF-2108	2000W	1.07/1.2	143X159X179	5088	10188	12372

PTC HEATER



NFJ-24-1

- 12-hour timer
- Temperature display
- 3D flame
- Voice control
- Humidifying spray
- Remote control
- Overheat protection
- Power off when tilted/fallen
- Intelligent constant temperature



TSN-24-1

- 12-hour timer
- Temperature display
- 3D flame
- Voice control
- Remote control
- Overheat protection
- Power off when tilted/fallen
- Intelligent constant temperature

Model	Power	N.W	Product size	Box size
NJF-24-1	2000/1000	6.5	102X15X20	114X20.5X25.5
TSN-24-1	2000/1000	5.6	97X15X20	109X20.5X25.5

PTC HEATER



QN2101A/QN2101AR

- Power: 1000/2000W
- N.W./G.W: 1.7kg/2.1kg
- Product Dim: 120*230*620mm
- Package Dim: 175*175*660mm
- MOQ: 2000units
- 40HQ : 3350pcs
- Port of Loading: Ningbo



NPT-20ZL06/NPT-20ZL06R

- Power: 5/1000/2000W
- N.W./G.W: 1.7kg/2.5kg
- Product Dim: 225*212*625mm
- Package Dim: 240*250*665mm
- MOQ:1700units
- 40HQ : 1700pcs
- Port of Loading: Ningbo



QN2308/QN2308R

- Power: 1000/2000W
- N.W./G.W: 2.3kg/2.8kg
- Product Dim: 122*220*620mm
- Package Dim: 188*175*685mm
- MOQ:3100units
- 40HQ : 3100pcs
- Port of Loading: Ningbo

PTC HEATER



NPT-22ZL07/NPT-22ZL07R

- Power: 5/1000/2000W
- N.W./G.W: 2.3kg/3.2kg
- Product Dim: 300*300*898mm
- Package Dim: 200*200*940mm
- MOQ: 1800units
- 40HQ : 1800pcs
- Port of Loading: Ningbo



NPT-20ZL05/NPT-20ZL05R

- Power: 5/1000/2000W
- N.W./G.W: 1.5kg/2.3kg
- Product Dim: 210*210*610mm
- Package Dim: 240*240*650mm
- MOQ:2700units
- 40HQ : 2700pcs
- Port of Loading: Ningbo



NPT-20ZL09/NPT-20ZL09R

- Power: 5/1000/2000W
- N.W./G.W: 1.8kg/2.6kg
- Product Dim: 245*245*698mm
- Package Dim: 200*200*740mm
- MOQ:2250units
- 40HQ : 2250pcs
- Port of Loading: Ningbo

TOWER PTC FAN HEATER



TPH1108N

220-240V-.50Hz
2 heating settings:1000W/2000W
Overheat protection
Adjustable thermostat
Power indicator Light
Safety Tip-over Switch
Wide angle oscillation



TPH110R

220-240V-.50160Hz
LED display
2 heat setting:1000w/2000W
Cooland warm wind option
highheating efficiency
12 hours timer
Overheating protection
Safoty thermnl fuse builtin
Safety tip over switch
Oscilating function
Remote conrol
With hame imaae



TPH1108

220-240V-.50160Hz
2 heating settings:1000W/2000\overheat proiection
Safety thermal fuse builtin
Satety tip over switch
Oscillating function
With flame image



YF-HN2401

- Height: 65 cm
- Power: 2000W
- Net weight: 1.5 kg
- Operation mode: Knob
- Functions: 5W - 1300W - 2000W

FAN HEATER SERIES



LQ501

220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic ControlTemperature
Overheat protection
PowerIndicatorLight



LQ901

220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic ControlTemperature
Overheat protection
PowerIndicatorLight



LQ801A

220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Automatic ControlTemperature
Overheat protection
PowerIndicatorLight



LQ801

220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic ControlTemperature
Overheat protection
PowerIndicatorLight



LQ202

220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic ControlTemperature
Overheat protection
PowerIndicatorLight

Model	LQ501	LQ901	LQ801N	LQ801	LQ202
Power	1000W/2000W	1000W/2000W	1000W/2000W	1000W/2000W	1000W/2000W
N.W/G.W(Kg)	0.85/1.0	0.98/1.05	0.88/1.02	0.88/1.02	0.88/1.02
Giftbox(mm)	220X135X265	255X125X265	225X135X266	225X135X266	265X125X265
Exportcarton(mm)	555X228X545	388X264X545	555X233X547	555X233X547	388X273X540
PCS/CTN	8	6	8	8	6
PCS/20'	3352pcs	3000pcs	3344pcs	3344pcs	2898pcs
PCS/40'	7000pcs	6198pcs	6680pcs	6680pcs	6000pcs
PCS/40' HQ	8000pcs	7266pcs	7744pcs	7744pcs	7236pcs

FAN HEATER SERIES



LQ616

220-240V-50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic Control Temperature
Overheat protection
PowerIndicatorLight,...



LQ616B

220-240V-.50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic Control Temperature
Overheat protection
Power indicatorLight
Wide angle oscillation



LQ818

220-240V-.50/60Hz
2 heating power:400w/800W
Streamline design,refnement
Automatic tip-over protect
Quartz tubes special processed
Long and equably heating



LQ818B

220-240V-50/60Hz
2 heating power:400w1800W
Streamline design,refnement
Automatic fip-over protect
Quartz tubes special processed
Long and equably heating
Wide angle oscillation

Model	LQ616	LQ616B	LQ818	LQ818B
Power	2000W	2000W	2000W	2000W
N.W/G.W(Kg)	0.95/1.1	1.1/1.3	0.9/1.0	1.2/1.4
Giftbox(mm)	220X175X365	220X175X295	230X130X253	240X140X290
Exportcarton(mm)	540X230X545	570X230X605	535X240X520	405X290X595
PCS/CTN	6	6	8	6
PCS/20'	2478pcs	2100pcs	3304pcs	2640pcs
PCS/40'	5120pcs	4398pcs	6904pcs	5400pcs
PCS/40' HQ	6000pcs	5100pcs	8100pcs	6456pcs

FAN HEATER SERIES



LQ101B

220-240V-.50/60Hz
2heat settings:1000/2000V
Cool/Warm/Hot wind for selection
Automatie ControiTemperature
Overheat protection
.Power Indicator Light



LQ101

220-240V-.50/60Hz
2 heat settings:1000/2000V
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic Control Temperature
Overheat protection
Power indicatorLight



FH18

220-240V-.50/60Hz
2 heat settings:1000/2000w
CoolWarm/Hot wind for selection
Adjustable Room Thermostat
Automatic Control Temperature
Overheat protection
Powerindicator Light



FH19

220-240V.50/60Hz
2 heat settings:1000/2000W
Cool/Warm/Hot wind for selection
Adjustable Room Thermostat
Automatic Control Temperature
Overheatprotection
Powerindicator Light



FH20

220-240V-.50/60Hz
2 heat settings:100012000V
.Cool"WarmfHotwind forselection
Adjustable Room Thermostat
*Automatic Control Temperature
Overheat protection
Powerindicator Light

Model	LQ101B	LQ101	FH18	FH19	FH20
Power	2000W	2000W	2000W	2000W	2000W
N.W/G.W(Kg)	1.0/1.2	1.0/1.2	1.0/1.2	1.0/1.2	1.0/1.2
Giftbox(mm)	232X110X235	232X110X235	195X135X250	208X147X258	242X145X270
Exportcarton(mm)	566X240X485	566X240X485	563X207X515	455X216X531	585X250X550
PCS/CTN	10	10	8	6	6
PCS/20'	4200pcs	4200pcs	3704pcs	2958pcs	2800pcs
PCS/40'	8900pcs	8900pcs	7760pcs	6486pcs	5800pcs
PCS/40' HQ	10400pcs	10400pcs	9040pcs	7626pcs	6800pcs

FAN HEATER SERIES



220-240V-.50160Hz
2 heat settings:1000/2000W
Overheat protection
Power indicator Light

FH103A



220-240V-50160Hz
2 heat settings:1000/2000W
Overheat protection
Power indicator Light

AH-002



ARD-905A

220-240V -50Hz 1500W
2 heating setting :750W/1500W
PTC Ceramic heating element
Cool/Warm/hot wind forr select.ion
Overheat pro tect.ion
Tip-over switch
Adjustable thermostat control
Automatic oscillating control
Gift box(mm):185x160x290
Carton(mm):490x195x605
Pcs/carton:6
N.W/G.W:1.50kg/1 .70kg
20'GP/40'GP/40'HQ:2988/6276/6912



ARD-906

220-240V -50Hz 1500W
2 heating selling :750W/1500W
PTC Ceramic healing element
Cool/Warm/hot wind for selection
Overheat protection
Tip-over switch
Adjustable thermostat control
Automatic oscillating control
Gift box(mm):185x160x230
Carton(mm):495x195x475
Pcs/carton:6
N.W/G.W:1.12kg/1.26kg
20'GP/40'GP/40'HQ:3666/7590/8898



XY-609

Material/Color: ABS
Power:650W/1000W
Weight:0.83Kg
Product Size: 180X100X150mm
Packing Size: 190X135X205mm
Number per Carton:18 units
Outer Carton Size: 59X43X43cm
Outer Carton weight:16.3kg
Rated Voltage: 110V/220V

Model	FH103A	AH-002	ADR-905A	ADR-906
Power	2000W	2000W	1500W	1500W
N.W/G.W(Kg)	0.1/1.3	1.2/1.4	1.5/1.7	1.12/1.26
Giftbox(mm)	240X160X205	250X230X178	185X160X290	185X160X230
Exportcarton(mm)	495X250X630	520X470X555	490X195X605	495X195X475
PCS/CTN	12	12	6	6
PCS/20'	3200pcs	2400pcs	2988pcs	3666pcs
PCS/40'	6656pcs	5160pcs	6272pcs	7590pcs
PCS/40' HQ	7760pcs	6000pcs	6912pcs	8898pcs

QUARTZ HEATER



LW-01

Quartz Heater
220-240V~.50/60Hz
2 heating power:400w/800W
Streamline design,refinement
Automatic tip-over protect
Quartz tubes special processed
Long and equably heating



LW-02

Quartz Heater
220-240V~.50/60Hz
2 heating power:400w/800W
Streamline design,refinement
Automatic tip-over protect
Quartz tubes special processed
Long and equably heating



LW-03

Quartz Heater
220-240V~.50/60Hz
2 heating power:400w/800W
Streamline design,refinement
Automatic tip-over protect
Quartz tubes special processed
Long and equably heating

Model	LW-01	LW-02	LW-03
Power	800W	800W	1200W
N.W/G.W(Kg)	0.8/0.9	0.85/1.05	1.0/1.1
Giftbox(mm)	260X85X370	300X95X375	496X70X255
Exportcarton(mm)	443X270X755	495X310X770	517X80X519
PCS/CTN	10	10	8
PCS/20'	3120pcs	2340pcs	1840pcs
PCS/40'	6400pcs	5460pcs	3840pcs
PCS/40' HQ	7560pcs	5760pcs	4536pcs

INDUSTRIAL HEATER



GYN-20



QMP-201



GYN-31



GYN-20F



GYN-30F

Model	Power	N.W/G.W	Product size	Box size
GYN-20F	2000W	1.75/2.2	20X16.5X27	23.5X21X29.5
GYN-30F	3000W	2.6/3.2	24X22X30.5	31X23.5X34
GYN-20	2000W	1.4/1.7	18.5X15.5X23.5	24X17.5X26
GYN-31	3000W	2.4/3.1	2.4X20.5X29	29X23.5X31
QMP-201	2000W	1.0/1.3	15X11X19.5	19X14X21.5

INDUSTRIAL HEATER

5000W



CZ220

7500W



CZ230ER

10000W

15000W



CZ260ER

Model	Products Size (mm)	N.W/G.W (Kg)	Gift Box Size (mm)	20'GP (PCS)	40'HQ (PCS)
CZ220	415x300x470	8. 7/9.85	435x343x366	500	1232
CZ230ER	415x300x470	9. 2/10. 35	435x343x366	500	1232
CZ260ER	520x460x725	18.5/20	520x517x540	180	440



CZ798BK/CZ799BK

Heater for Home, Garage, Barn
Power:1500W
Milkhouse Utility Heater
Durable All-purpose heating
2 heat settings and fan-only setting
Adjustable thermostat
Power& Caution indicatorlight
Durable All-Metal construction
Stay-cool body with oversized carry handle
Safety tip-over switch



CZ2032/CZ2062

AC110-120V, 1500W
Digital infrared quartz heater with remote control
Furniture grade wood cabinet
Fan-forced wide heat dispersion
Digital display shows all heater function
Energy saving ECO mode
Digital thermostat
12 hourAuto-ON/Auto-OFF Timer
Long lasting galvanized interior heat chamber
Safety tip-over cutoff switch

AIR CIRCULATION FAN HEATER



ARD-13J

2 heating 1000W/2000W
PTC heating
Warm/hot wind for selection
Adjustable room thermostat
Remote control
Overheat protection
Carton Meas(mm):325X255X230
N.W/G.W: 1.9kg/2.3kg
20'GP40'GP40'HQ:1259/2832/3567



ARD-09A

2 heating 1000W/2000W
Wide angle and wide range heating
Warm/hot wind for selection
Adjustable room thermostat
Knob control
Overheat protection
Carton Meas(mm):325X255X230
N.W/G.W: 1.9kg/2.3kg
20'GP40'GP40'HQ:1259/2832/3567



ARD-09B

2 heating 1000W/2000W
Wide angle and wide range heating
Warm/hot wind for selection
Adjustable room thermostat
Remote control
Overheat protection
Carton Meas(mm):325X255X230
N.W/G.W: 1.9kg/2.3kg
20'GP40'GP40'HQ:1259/2832/3567



XY-615

Material/Color: ABS
Power:500W
Weight:1.32Kg
Product Size: 120X120X190mm
Packing Size: 155X140X205mm
Number per Carton:18 units
Outer Carton Size: 48.5X44X43.5cm
Outer Carton weight:19kg
Rated Voltage: 110V/220V



XY-612

Material/Color: ABS
Power:1200W/1500W
Weight:1.25Kg
Product Size: 150X110X230mm
Packing Size: 160X135X250mm
Number per Carton:16 units
Outer Carton Size: 58X53.5X35cm
Outer Carton weight:21kg
Rated Voltage: 110V/220V



AW-3002

Product: 70X195X287mm
N.W: 1.2kg
Color box: 600x555x305mm
QTY/CTN: 6
20'GP40'GP40'HC:1528/3195/3751



ARD-12S

Halogen heating element
3 Power settings: 400W/800W/1200W
Instant heating warm
Safety tip-over switch
Easy portable and move
90° Oscillation function
Color: Grey/Black/White
Gift box(mm):290x145x485
Pcs/carton:1
N.W/G.W:1.7kg/2.1 kg
20'GP40'GP40'HQ:1300/3000/3400



ARD-12

Halogen heating element
3 Power settings: 400W/800W/1200W
With handle
Instant heating warm
Safety tip-over switch
Easy portable and move
90° Oscillation function
SKD order accepted
Gift box(mm):340x160x570
Pcs/carton:1
N.W/G.W:2.4kg/2.7kg
20'GP40'GP40'HQ:950/1950/2120



ARD-12HC

Halogen heating element
4Power settings:400W/800W/1200W/1600W
With handle
Instant heating warm
Safety tip-over switch
Easy portable and move
90° Oscillation function
Color Grey/Black
SKD order accepted
Gift box(mm):340x160x570
Pcs/carton: 1
N.W/G.W:2.4kg/2.7kg
20'GP40'GP40'HQ:950/1950/2120



ARD-12SH

Halogen heating element
3 Power settings: 400W/800W/1200W
With handle
Instant heating warm
Safety tip-over switch
Easy portable and move
90° Oscillation function
SKD order accepted
Gift box(mm):290x145x485
Pcs/carton :1
N.W/G.W:1.7kg/2.1 kg
20'GP40'GP40'HQ:1300/3000/3400



ARD-12H

Halogen heating element
3 Power settings: 400W/800W/1200W
With handle
Instant heating warm
Safety tip-over switch
Easy portable and move
90° Oscillation function
SKD order accepted
Gift box(mm):340x160x570
Pcs/carton:1
N.W/G.W:2.4kg/2.7kg
20'GP40'GP40'HQ:950/1950/2120



ARD-12YY

Halogen heating element
3 Power Settings: 400W/800W/1200W
Instant heating warm
Safety tip-over switch
Easy portable and move
Color Grey/Black/White
Without swing function
Gift box(mm):290x145x485
Pcs/carton:1
N.W/GW:1.7kg/2.1 kg
20'GP40'GP40'HQ:1300/3000/3400

OIL HEATER

- 220-240v,50/60Hz
 - Three heating settings
 - Triple overheat protection system
 - Pressure tasted for safety
 - Energy efficient and fast heat radiation
 - With cord storage
- Fin Dimension:160x600mm
 - Adjustable thermostat control
 - Operation switches with indicator lights
 - Large heating surface and radiation
 - Smooth castors for easy
 - Easy to clean



HY-A3 HY-A3-F



HY-A4 HY-A4-T HY-A4F HY-A4-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.9/8.8	385X170X665	1600pcs
9 FINS	2000W	10/11	460X170X665	1338pcs
11 FINS	2500W	12.1/13.2	540X170X665	1142pcs
13 FINS	2500W	14.2/15.4	615X170X665	999pcs

OIL HEATER

- 220-240v,50/60Hz
 - Three heating settings
 - Triple overheat protection system
 - Pressure tasted for safety
 - Energy efficient and fast heat radiation
 - With cord storage
- Fin Dimension:160x600mm
 - Adjustable thermostat control
 - Operation switches with indicator lights
 - Large heating surface and radiation
 - Smooth castors for easy
 - Easy to clean



HY-A5 HY-A5-T HY-A5F HY-A5-FT



HY-A6 HY-A6-F



Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.9/8.8	385X170X665	1600pcs
9 FINS	2000W	10/11	460X170X665	1338pcs
11 FINS	2500W	12.1/13.2	540X170X665	1142pcs
13 FINS	2500W	14.2/15.4	615X170X665	999pcs

OIL HEATER

- 220-240v,50/60Hz
- Three heating settings
- Triple overheat protection system
- Pressure tested for safety
- Energy efficient and fast heat radiation
- With cord storage

- Fin Dimension:160x600mm
- Adjustable thermostat control
- Operation switches with indicator lights
- Large heating surface and radiation
- Smooth castors for easy
- Easy to clean



HY-A7 HY-A7-T HY-A7F HY-A7-FT



HY-A8 HY-A8-F

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.9/8.8	385X170X665	1600pcs
9 FINS	2000W	10/11	460X170X665	1338pcs
11 FINS	2500W	12.1/13.2	540X170X665	1142pcs
13 FINS	2500W	14.2/15.4	615X170X665	999pcs

OIL HEATER

- 220-240v,50/60Hz
- Three heating settings
- Triple overheat protection system
- Pressure tested for safety
- Energy efficient and fast heat radiation
- With cord storage

- Fin Dimension:160x600mm
- Adjustable thermostat control
- Operation switches with indicator lights
- Large heating surface and radiation
- Smooth castors for easy
- Easy to clean



HY-A9 HY-A9-T HY-A9F HY-A9-FT



HY-A9 HY-A9-T HY-A9F HY-A9-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.9/8.8	385X170X665	1600pcs
9 FINS	2000W	10/11	460X170X665	1338pcs
11 FINS	2500W	12.1/13.2	540X170X665	1142pcs
13 FINS	2500W	14.2/15.4	615X170X665	999pcs



- 220-240v,50/60Hz
- Three heating settings
- Triple overheat protection system
- Pressure tested for safety
- Energy efficient and fast heat radiation
- With cord storage

- Fin Dimension:160x600mm
- Adjustable thermostat control
- Operation switches with indicator lights
- Large heating surface and radiation
- Smooth castors for easy
- Easy to clean



HY-A13 HY-A13-T HY-A13F HY-A13-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.9/8.8	385X170X665	1600pcs
9 FINS	2000W	10/11	460X170X665	1338pcs
11 FINS	2500W	12.1/13.2	540X170X665	1142pcs
13 FINS	2500W	14.2/15.4	615X170X665	999pcs

OIL HEATER

- 220-240v,50/60Hz
- Three heating settings
- Triple overheat protection system
- Pressure tested for safety
- Energy efficient and fast heat radiation
- With cord storage

- Fin Dimension:145x580mm
- Adjustable thermostat control
- Operation switches with indicator lights
- Large heating surface and radiation
- Smooth castors for easy
- Easy to clean



HY-B1 HY-B1-T HY-B1F HY-B1-FT



HY-B2 HY-B2-T HY-B2F HY-B2-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER

- 220-240v,50/60Hz
- Three heating settings
- Triple overheat protection system
- Pressure tested for safety
- Energy efficient and fast heat radiation
- With cord storage

- Fin Dimension:145x580mm
- Adjustable thermostat control
- Operation switches with indicator lights
- Large heating surface and radiation
- Smooth castors for easy
- Easy to clean



HY-B3



HY-B3-T



HY-B4



HY-B4-T



HY-B4F



HY-B4-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER



- 220-240v,50/60Hz
- Three heating settings
- Triple overheat protection system
- Pressure tested for safety
- Energy efficient and fast heat radiation
- With cord storage

- Fin Dimension:145x580mm
- Adjustable thermostat control
- Operation switches with indicator lights
- Large heating surface and radiation
- Smooth castors for easy
- Easy to clean



HY-B5



HY-B5



HY-B5D



HY-B6



HY-B6-F

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER

- 220-240v,50/60Hz
 - Three heating settings
 - Triple overheat protection system
 - Pressure tested for safety
 - Energy efficient and fast heat radiation
 - With cord storage
- Fin Dimension:145x580mm
 - Adjustable thermostat control
 - Operation switches with indicator lights
 - Large heating surface and radiation
 - Smooth castors for easy
 - Easy to clean



HY-B7



HY-B7-T



HY-B7-F



HY-B7-FT



HY-B8



HY-B8-T

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER

- 220-240v,50/60Hz
 - Three heating settings
 - Triple overheat protection system
 - Pressure tested for safety
 - Energy efficient and fast heat radiation
 - With cord storage
- Fin Dimension:145x580mm
 - Adjustable thermostat control
 - Operation switches with indicator lights
 - Large heating surface and radiation
 - Smooth castors for easy
 - Easy to clean



HY-B9



HY-B9-T



HY-B9-F



HY-B9-FT



HY-B10



HY-B21



HY-B23



HY-B24



HY-B25

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER

- 220-240v,50/60Hz
 - Three heating settings
 - Triple overheat protection system
 - Pressure tested for safety
 - Energy efficient and fast heat radiation
 - With cord storage
- Fin Dimension:145x580mm
 - Adjustable thermostat control
 - Operation switches with indicator lights
 - Large heating surface and radiation
 - Smooth castors for easy
 - Easy to clean



HY-B11

HY-B11-F



HY-B12

HY-B12-T

HY-B12-F

HY-B12-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER



- 220-240v,50/60Hz
 - Three heating settings
 - Triple overheat protection system
 - Pressure tested for safety
 - Energy efficient and fast heat radiation
 - With cord storage
- Fin Dimension:145x580mm
 - Adjustable thermostat control
 - Operation switches with indicator lights
 - Large heating surface and radiation
 - Smooth castors for easy
 - Easy to clean



HY-B13

HY-B13-T

HY-B13-F

HY-B13-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	7.6/8.4	365X150X665	1918pcs
9 FINS	2000W	9.3/10.2	440X150X655	1616pcs
11 FINS	2500W	11.0/12.0	515X150X655	1378pcs
13 FINS	2500W	12.4/13.5	590X150X655	1198pcs

OIL HEATER

- 220-240v,50/60Hz
- Three heating sottings
- Adjustable thermostat control
- Triple overhear protection system
- Operation switches with indicator lights
- Pressure tosted for safety
- Large heating surface and radiation
- Energy efficient and fast heat radiation



HY-C1



HY-C1-F



HY-C3



HY-C3-T



HY-C3-F



HY-C3-FT

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	6.4/7.0	360X135X640	2070pcs
9 FINS	2000W	7.8/8.5	440X135X640	1726pcs
11 FINS	2500W	9.0/10.0	515X135X640	1470pcs
13 FINS	2500W	11.6/11.5	590X135X640	1278pcs

OIL HEATER

220V-240V, 50/60Hz

- 220-240v,50/60Hz
- Three heating sottings
- Adjustable thermostat control
- Triple overhear protection system
- Operation switches with indicator lights
- Pressure tosted for safety
- Large heating surface and radiation
- Energy efficient and fast heat radiation



HY-C4



HY-C4-T



HY-C5



HY-C5-F

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	6.4/7.0	360X135X640	2070pcs
9 FINS	2000W	7.8/8.5	440X135X640	1726pcs
11 FINS	2500W	9.0/10.0	515X135X640	1470pcs
13 FINS	2500W	11.6/11.5	590X135X640	1278pcs

OIL HEATER



- 220-240v,50/60Hz
- Three heating sottings
- Adjustable thermostat control
- Triple overheat protection system

- Operation switches with indicator lights
- Pressure tested for safety
- Large heating surface and radiation
- Energy efficient and fast heat radiation



HY-D21



HY-D22



HY-D23

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	6.4/7.5	370X135X650	2048pcs
9 FINS	2000W	8.2/9.0	440X135X650	1726pcs
11 FINS	2500W	8.7/10.7	515X135X650	1470pcs
13 FINS	2500W	11.2/12.3	590X135X650	1278pcs

OIL HEATER



- 220-240v,50/60Hz
- Three heating sottings
- Adjustable thermostat control
- Triple overheat protection system

- Operation switches with indicator lights
- Pressure tested for safety
- Large heating surface and radiation
- Energy efficient and fast heat radiation



HY-D24



HY-D24-RC



HY-D25



HY-D26

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	6.4/7.0	360X135X640	2070pcs
9 FINS	2000W	7.8/8.5	440X135X640	1726pcs
11 FINS	2500W	9.0/10.0	515X135X640	1470pcs
13 FINS	2500W	11.6/11.5	590X135X640	1278pcs

OIL HEATER

- 220-240v,50/60Hz
- Three heating sottings
- Adjustable thermostat control
- Triple overheat protection system

- Operation switches with indicator lights
- Pressure tested for safety
- Large heating surface and radiation
- Energy efficient and fast heat radiation



Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	6.4/7.0	360X135X640	2070pcs
9 FINS	2000W	7.8/8.5	440X135X640	1726pcs
11 FINS	2500W	9.0/10.0	515X135X640	1470pcs
13 FINS	2500W	11.6/11.5	590X135X640	1278pcs

OIL HEATER



- 220-240v,50/60Hz
- Three heating sottings
- Adjustable thermostat control
- Triple overheat protection system

- Operation switches with indicator lights
- Pressure tested for safety
- Large heating surface and radiation
- Energy efficient and fast heat radiation



HY-D1

HY-D2

HY-D3

HY-D4

Model	Power	N.W/G.W(Kg)	Giftbox(mm)	QTY/40HQ
7 FINS	1500W	6.4/7.2	360X125X640	2240pcs
9 FINS	2000W	7.6/8.5	430X125X635	1835pcs
11 FINS	2500W	8.9/9.9	505X125X635	1563pcs
13 FINS	2500W	10.1/11.2	580X125X635	1382pcs

FREESTANDING FIREPLACE



SF-1418
Electric Fireplace Stove
1750-1950W/ 220-240V , 1500W/120V
2 heat setting level with dimmer
Open door for control panel



SF-22MQ
Electric Fireplace Stove
1750-1950W/ 220-240V , 1500W/120V
2 heat setting level with dimmer
Open door for control panel



SF-1816B
Electric Fireplace Stove
1750-1950W/ 220-240V , 1500W/120V
2 heat setting level with dimmer
Open door for control panel



SF-1818
Electric Fireplace Stove
1750-1950W/ 220-240V , 1500W/120V
1 heat setting level with dimmer
Open door for control panel

Model	Products Size (mm)	N.W/G.W (Kg)	Gift Box Size (mm)	20' GP (PCS)	40'HQ (PCS)
SF-1418	425x253x551	5.5/6.2	468x297x520	380	940
EF-22MQ	405x252x540	5.8/6.5	452x294x563	380	900
SF-1816B	370x230x555	6.2/7.3	430x290x555	390	970
SF-1818	565x301x635	8.2/9.9	638x346x625	200	480

DESKTOP FIREPLACE



TFP-15A
Power: 1500W
2 heat setting level
Flame can be used without heat



TFP-15C
Power: 1500W
2 heat setting levels
With dimmer



SF-2213B
Power: 1500W/1800W
2 heat setting levels
Heat & flame can be used independently

Model	Products Size (mm)	N.W/G.W (Kg)	Gift Box Size (mm)	20' GP (PCS)	40'HQ (PCS)
FP-T24A/FP-T24Y	200x180x700	2.2/2.8	235x235x670	1100	2700
TFP-15A	245x140x240	1.6/1.9	240x175x250	2250	5490
TFP-15C	200x135x340	1.7/2.1	235x185x385	1700	4160
SF-2213B	303x175x375	3.4/4.0	346x197x430	970	2328



FP-T24A / FP-T24Y
Power: 220-240V/2000W; 120V/1500W
Size: 23.5x23.5x67cm

ELECTRIC FIREPLACE



IF-1516

- ◆Real log flame effect
- ◆Black cast effect finish
- ◆Flame effect can be used independently
- ◆2 heat settings option
- ◆Remote control
- ◆Timer function
- ◆Temperature setting function
- ◆Thermal cut-off device
- ◆Power:120V/60HZ 1500W
- ◆220-240V 50/60HZ 2000W

Model	Products Size (mm)	Gift Box Size (mm)	20' GP (PCS)	40'GP (PCS)	40'HQ (PCS)
IF-1516	523x163x583	577x225x650	335	695	815



IF-1526

- ◆28 inch Electric fireplace insert with wooden frame
- ◆Quartz heating tube for fast heat
- ◆2 heat setting option
- ◆With Remote control
- ◆12 hours timer
- ◆Realistic log flame effect
- ◆Flame can be used with or without heat
- ◆LED display control panel
- ◆Electronic temperature control gives more precise temperature
- ◆Certificates: ETL

Model	Products Size (mm)	N.W/G.W (Kg)	Gift Box Size (mm)	20' (PCS)	40' GP (PCS)	40 HQ (PCS)
IF-1526	712*580*566	19/21.8	757*325*602	180	360	392




IH-20N/IH-23N/IH-26N

Optional size: 20/23/26 inch *1800W/220-240V, 1500W/120V
2 heating levels *5 kinds of flame color
12 hours timer *Temperature setting function

Model	Unit Size (mm)	N.W/G.W.(kg)	Packing Size (mm)	20'GP (pcs)	40'HQ(pcs)
IH-20N	506x223x295	5.3/6.6	568x265x365	500	1230
IH-23N	586x223x295	6.3/8	660x265x355	440	1090
IH-26N	662x223x295	6.7/8.6	740x265x355	395	970

WALL MOUNTED FIREPLACE

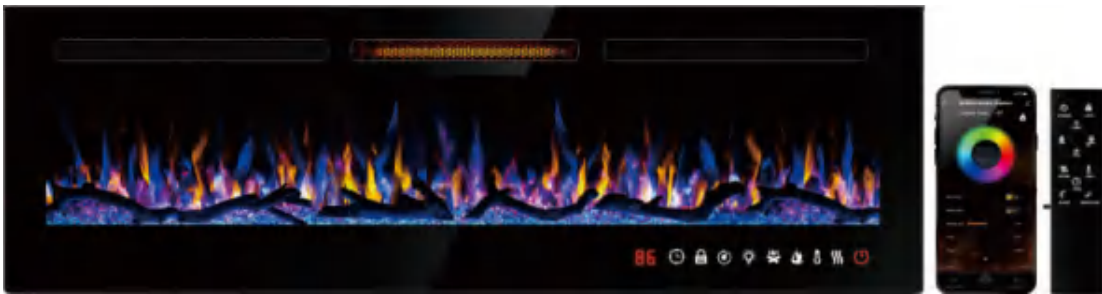

- Power: 1500W/120V, 2000W/220-240V
- Extra-thin design
- 13 kinds of flame color
- TUYA WIFI optional

Model	Optional Size(Inch)	N.W/G.W (Kg)	Products Size(cm)	Qty/20'(PCS)	40'HQ(PCS)
EF-2236NQ	36	14/17.8	91*10*46	300	772
EF-2242NQ	42	16.9/20.7	106.7*10*46	260	688
EF-2250NQ	50	20.5/23.5	127*10*46	220	568
EF-2260NQ	60	24/28.4	152.4*10*46	190	488
EF-2268NQ	68	26.6/35.1	172.7*10*46	135	340



- Power: 1500W/120V, 2000W/220-240V
- Narrow boarder with big screen13 kinds
- of flame colorTUYA WIFI optional

Model	Optional Size(Inch)	N.W/G.W (Kg)	Products Size(cm)	Qty/20'(PCS)	40'HQ(PCS)
EFW-36A	36	14/17.8	91*13.7*41	230	606
EFW-42A	42	16.9/20.7	107*13.7*41	200	544
EFW-50A	50	20.5/23.5	127*10*46	180	452
EFW-60A	60	24/28.4	152*13.7*41	155	388
EFW-68A	68	27/31	173*13.7*41	120	295

WALL MOUNTED FIREPLACE




EFW-36FF

Size: 36 inch
Power: 1500W/120V, 2000W/220-240V
4 kinds of flame color
Wall mounted & freestanding

Model	Products Size (mm)	N.W/G.W (Kg)	Gift Box Size (mm)	20 (PCS)	40'GP (PCS)	40'HQ (PCS)
EFW-36FF	910*145*420	16.5/18.5	953*189*462	330	690	778

2-Way Installation

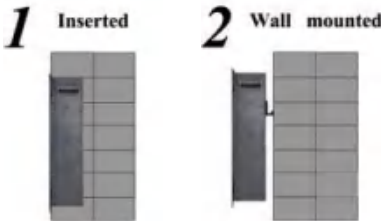

EF-2036FA/2042FA/EF-2050FA/2060FA

Optional Size: 36/42/50/60 inch
Power: 1500W/120V, 2000W/220-240V
12 kinds of flame color
Log & crystal pieces for choice



EF-10B

Size: 22 inch
Power: 1500W/120V, 2000W/220-240V
Curved glass panel
LED display & remote control
Wall mounted & freestanding



SF-2103

Size: 22 inch
Power: 2000W/220-240V, 1500W/120V
Mechanical control
2 heat setting levels

WALL MOUNTED FIREPLACE



EF-2211B



Size: 26 inch
Power: 2000W/220-240V
Extra-thin design
7 kinds of backlight



EF-2214B



Size: 35 inch
Power: 2000W/220-240V
Extra-thin design
7 kinds of backlight



EF-1650 Flat Panel



Size: 50 inch
Power: 2000W/220-240V
Wall mounted & Freestanding
Deluxe Glass Stand

Model	Products Size(cm)	N.W/G.W (Kg)	Gift Box Size(cm)	Qty/20'(PCS)	40'HQ(PCS)
EF-2211B	65*11*48	9.5/11.2	71*17*54	415	1024
EF-2214B	89*13*48	13/15.5	95*19*54	280	700
EF-1650	128*138*550	20/24	135*20*62.5	150	372

INFRARED HEATER



XXL-200D
Rated Power: 2000W
L/Qty(20/40/40H): 532/1092/1280Pcs



XXL-200
Rated Power: 2000W
L/Qty(20/40/40H): 532/1092/1280Pcs



XXL-200S
Rated Power: 2000W
L/Qty(20/40/40H): 532/1092/1580Pcs



XXL-200M/200C
Rated Power: 2000W
L/Qty(20/40/40H): 532/1092/2060Pcs



XXL-200TM
Rated Power: 2000W
L/Qty(20/40/40H): 532/1092/1580Pcs



XXL-200N/200TN
Rated Power: 2000W
L/Qty(20/40/40H): 532/1092/2060Pcs

QUARTZ HEATER



CH-18FP
Max Power: 1800W
Packing: 1pc/gift box
Gift box size: 430X203X620mm
Product Size: 400X173X584mm
QTY 20FT/40FT/40HQ: 510/1070/1250 PCS



SYH-1709
Max Power: 1500W
Packing: 1pc/gift box
Gift box size: 498X260X496mm
Product Size: 468X230X451mm
QTY 20FT/40FT/40HQ: 430/900/1050 PCS



IFP-20T3
220-240V 50/60Hz 2000W
With Safety tip-over switch
Measurement(mm): 577x237x592
40HQ: 736Pcs



SF-24/24SA
Flame effect can be used independently
2 heat settings option
Adjustable flame brightness
Adjustable thermostat control
Safety thermal cut-off device
Power: 220-240V 750/1500W



SYH-1307A-LZ
Max power: 2000W
With 4 quartz tubes (3+1)
With two face of heating
Packing size: 475*235*460mm
40'HQ: 1220pcs



SYH-1307B-LZ
Max Power 1800W
With 3 quartz tubes (2+1)
With two face of heating
Packing size: 480*240*363mm
40'HQ: 1685pcs

QUARTZ HEATER



SYH-1833

*220-240V, 50/60Hz, 3000W
*4 heat settings: 600W/1200W/1200W/3000W
*Products Size(mm): 82x180x520
*Box Size (mm): 690x185x530
*40'HQ(PCS): 1000



SYH-1701

*220V-240V 50/60Hz 2400W
*With safety tip-over switch
*Box Size (mm): 562X260X617
*40'HQ(PCS): 730



SYH-1307B

*220-240V 50/60Hz 1800W
*With safety tip-over switch
*Measurement(mm):475x235x358
*40HQ:1685Pcs



SYH-1307A

*220-240V 50/60Hz 2400W
*With safety tip-over switch
*Measurement(mm):475x235x460
*40HQ:1225Pcs



SYH-1208C/1208

*220V-240V 50/60Hz 2400W
*With safety tip-over switch
*Box size(mm):720x260x530
*40HQ: 800Pcs



SYH-1209C

*220-240V 50/60Hz 2400W
*With safety tip-over switch
*Packing(mm):670x120x750
*40HQ :1000Pcs



SYH-1206/1206S

*220-240V 50/60Hz 2000-2400W
*With Safety tip-over switch
*Measurement(mm):565x190x380
*40HQ: 1611pcs



SYH-1206A/1206B

*220-240V 50/60Hz 2000-2400W
*With Safety tip-over switch
*Measurement(mm):730x190x470
*40HQ: 1056Pcs



HG-5200A

*Max Power 2000W
*With 5 setting of power
*With 10 quartz tubes
*With feet touch switch
*40'HQ: 900pcs



SYH-1209/1209D

*220-240V 50/60Hz 2400W
*With safety tip-over switch
*Measurement(mm):490x165x540
*40HQ:1610Pcs



SYH-1207H/1207D

*220-240V 50/60Hz 1800/2400W
*With Safety tip-over switch
*Measurement(mm):570x200x450
*40HQ:1319/1824Pcs



SYH-1306

*220-240V 50/60Hz 1800-2000W
*With Safety tip-over switch
*Measurement(mm):550x190x397
*40HQ:1641Pcs

KEROSENE HEATER



WKH-2310 / 2310T

- *Heating Output: Max.9,000BTU/H

*Fuel Tank: Cartridge Type

*Tank Capacity: 5.3L

*Maximum Fuel Consumption(L/H): 0.25L/hr

*With safety tip-over switch
- *Heating Coverage: 15sqm

*Ignition Type: Match

*Fuel Type: Only Kerosene

*Chimney: Metal Chimney

Continuous Combustion Duration	N.W.(kg)	G.W.(kg)	Color	Dimension	Packing	L/Qty(20/40/40H)
About 18-19 hours	4.5	5.0	Red, White	325x325x470	1Pc/ctn	588/1150/1365Pcs



WKH-229SJ

- *Heating Output: Max.9,000BTU/H

*Fuel Tank: Cartridge Type

*Tank Capacity: 5.3L

*Maximum Fuel Consumption(L/H): 0.25L/hr
- *Heating Coverage: 15sqm

*Ignition Type: Match

*Fuel Type: Only Kerosene

*Chimney: Metal Chimney

Continuous Combustion Duration	N.W.(kg)	G.W.(kg)	Color	Dimension	Packing	L/Qty(20/40/40H)
About 18-19 hours	4.5	5.0	Red, White	325x325x385	1Pc/ctn	680/1400/1650Pcs



WKH-229DT

- *Heating Output: Max.9,000BTU/H

*Fuel Tank: Cartridge Type

*Tank Capacity: 4.4L

*Maximum Fuel Consumption(L/H): 0.25L/hr
- *Heating Coverage: 15sqm

*Ignition Type: Match

*Fuel Type: Only Kerosene

*Chimney: Metal Chimney

Continuous Combustion Duration	N.W.(kg)	G.W.(kg)	Color	Dimension	Packing	L/Qty(20/40/40H)
About 18-19 hours	4.0	4.4	Red	325x325x450	1Pc/ctn	625/1175/1439Pcs



TS-77 / 77T

- *Heating Output: Max.10,000BTU/H

*Fuel Tank: Cartridge Type

*Tank Capacity: 5.3L

*Maximum Fuel Consumption(L/H): 0.25L/hr
- *Heating Coverage: 18sqm

*Ignition Type: Match

*Fuel Type: Only Kerosene

*Chimney: Glass Chimney

Continuous Combustion Duration	N.W.(kg)	G.W.(kg)	Color	Dimension	Packing	L/Qty(20/40/40H)
About 18-19 hours	4.9	5.5	Red, White	325x325x450	1Pc/ctn	625/1175/1439Pcs



WKH-3300

- *Heating Output: Max.9,000BTU/H

*Fuel Tank: Cartridge Type

*Tank Capacity: 5.3L

*Maximum Fuel Consumption(L/H): 0.25L/hr
- *Ignition Type: Match

*Fuel Type: Only Kerosene

*Chimney: Metal Chimney

Continuous Combustion Duration	N.W.(kg)	G.W.(kg)	Color	Dimension	Packing	L/Qty(20/40/40H)
About 18-19 hours		5.0	White	325x325x385	1Pc/ctn	625/1175/1439Pcs

FLOOR FAN



14"



16"



18"



20"

Features:

- High velocity motor for maximum air circulation
 - Adjustable tilt to direct air
 - Metal construction
- Durable finish
 - 3 aluminum blades
 - Easy carry handle

Model NO	inch	Power	Product Size(cm)	Box Size(cm)	Packing Pcs/Ctn	N.W./G.W.(kg)	Oty/20"/ 40' 40QH(PCS)
PDF-14B	14"	65W	45.5x17.4x45	47x18x45.5	1	3.15/3.8	1749
PDF-16B	16"	100W	50x20x52.5	47x18x45.5	1	4.1/4.8	1749
PDF-18B	18"	100W	54.5x22.28x54.74	50x18x50.3	1	4.5/5.25	1420
PDF-20B	20"	100W	59x28.7x58	60x18x54.5	1	4.95/5.85	1096

LIFTING SMALL SUN HEATER



YF-907A



YF-908



YF-908A

Model	Power	N.W/G.W	Product dimensions	diameter
YF-907A	1200W	6.1/7.1	490X430X1290	480
YF-908	1000W	4.5/5.5	420X370X1140	410
YF-908A	1200W	4.8/5.8	450X370X1170	450

BIRDCAGE HEATER SERIES



YF-NL0650

- Power: 1000W
- Net weight/Gross weight: 1.1/2.1kg
- Product size: 225x225x360mm
- 360° heating
- Stepless temperature adjustment
- Triple thermal efficiency
- Flame retardant materials
- Noise-free soft light
- Over-temperature protection



YF-NL0655

- Power: 1200W
- Net weight/Gross weight: 1.2/2.2kg
- Product size: 240x240x340mm
- 360° heating
- Stepless temperature adjustment
- Triple thermal efficiency
- Flame retardant materials
- Noise-free soft light
- Over-temperature protection